




## 2 MPX Speed Dome IP Camera with face recognition and intelligent object tracking

NVIP-2SD-6540/25/F-II

6000 VSS  
IP

### FUNCTIONS

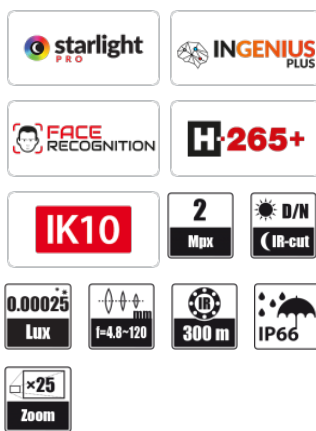

The camera is dedicated to work with NOVUS 6000 series recorders. Detailed data can be found in the compatibility table available in the **DOWNLOADABLE FILES** tab.

<b>Image</b>	
Image Sensor	2 MPX CMOS sensor 1/2.8" SmartSens
Number of Effective Pixels	1920 (H) x 1080 (V)
Min. Illumination	0.00125 lx/F1.6 - color mode, 0.00025 lx/F1.6 - B/W mode, 0 lx (IR on) - B/W mode
S/N Ratio	> 52 dB (AGC off)
Electronic Shutter	auto/manual: 1/25 s ~ 1/25000 s
Wide Dynamic Range (WDR)	yes (double scan sensor), 128dB
Digital Noise Reduction (DNR)	2D, 3D
Defog Function (F-DNR)	yes
Highlight Compensation (HLC)	yes
Back Light Compensation (BLC)	yes
Reduction of image flicker (Antiflicker)	yes
<b>Lens</b>	
Optical Zoom	25x
Lens Type	motorized, auto-iris function, f=4.8 ~ 120 mm/F1.6 ~ F3.8
Auto-focus	zoom trigger, day/night mode trigger, manual trigger
<b>Day/Night</b>	
Switching Type	mechanical IR cut filter
Switching Mode	auto, manual, time
Switching Level Adjustment	yes
Switching Schedule	yes
Visible Light Sensor	yes
<b>Network</b>	
Stream Resolution	1920 x 1080 (Full HD), 1280 x 720 (HD), 704 x 576, 352 x 288 (CIF), 480 x 240
Frame Rate	30 fps for each resolution
Multistreaming Mode	number of streams: 3
Video/Audio Compression	H.264, H.264+, H.265, H.265+, MJPEG/G.711
Number of Simultaneous Connections	max. 10
Bandwidth	40 Mb/s in total
Network Protocols Support	HTTP, TCP/IP, IPv4/v6, UDP, HTTPS, FTP, DHCP, DNS, DDNS, NTP, RTSP, RTP, UPnP, SNMP, QoS, IEEE 802.1X, PPPoE, SMTP, RTCP, HTML5
Camera Configuration	from Internet Explorer, Edge, Firefox, Chrome, Opera browser languages: Polish, English, and others
Compatible Software	NOVUS MANAGEMENT SYSTEM VSS, NOVUS MANAGEMENT SYSTEM AC, N Control 6000
Mobile applications	ipGO 6 (iPhone, Android)
<b>PTZ</b>	
Preset Commands	360 including 20 special (function) presets
Tours	8 (up to 16 presets per tour)
Patterns	4 (max. 360 commands or 180 s for each pattern)
Tilt/Pan Range	-10° ~ 90°/360° (continuous)
Pan/Tilt Speed	up to 200°/s (proportional to zoom)
Preset Speed	up to 240°/s
<b>Video Analytics</b>	
Functions	auto tracking linked to Video Content Analysis (VCA) functions, tamper, line cross, zone entrance, zone exit, cross counting, scene change, video blurred, video color cast, zone entrance detection and object tracking, objects distinguishing, comparing faces
<b>Other functions</b>	
Privacy Zones	4
Motion Detection	yes
Image Processing	180° image rotation, sharpening, mirror effect
Prealarm/Postalarm	up to 6 s/up to 120 s
System Reaction to Alarm Events	e-mail with attachment, saving file on FTP server, saving file on SD card, alarm output activation, object tracking
Restoring default settings	via web browser, via NMS IPTool software
<b>IR LED</b>	
LED Number	6
Range	up to 300 m (depends on current optical zoom value)
Smart IR	yes (hardware support)
<b>Interfaces</b>	
Audio Input/Output	1 x Jack (3.5 mm)/1 x Jack (3.5 mm)
Alarm Input/Output	1 (NO/NC)/1 relay type (max. 12VDC/300mA)
Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
Memory Card Slot	microSD - capacity up to 256GB
<b>Installation parameters</b>	

### COMPLIANCE



### KEY FEATURES

- Resolution: 2 MPX
- Lens: motorized varifocal, AI and AF function, optical zoom 25x, f=4.8 ~ 120 mm/F1.6 ~ 3.8
- Auto Tracking
- D/N function - IR cut filter
- Auto Tracking
- Video content analysis based on Deep Learning
- microSD card support
- WDR with double scan sensor
- two-way audio
- Min. Illumination from 0.00025 lx (0 lx, IR on)
- IR LED, range up to 300 m (depends on current optical zoom value)

### DIMENSIONS



173 mm


Dimensions (mm)	173 (Ø) x 268 (H) with bracket: 173 (W) x 415 (H) x 300 (L)
Weight	2.1 kg with bracket: 2.8 kg
Degree of Protection	IP 66 (details in the user's manual)
Enclosure	aluminium, white, IK10 impact rating, In set: outdoor housing (integrated with the camera), wall mount bracket Enclosure type: 6SD-M
Power Supply	12 VDC, PoE+ (IEEE 802.3at, Class 4)
Surge protection	TVS 6000 V
Power Consumption	6 W, 15.5 W (IR illuminator on), 22 W (IR and heater on)
Operating Temperature	-40°C ~ 65°C
Cold start temperature	-30°C
Humidity	max. 90%, relative (non-condensing)
Built-in Heater/Fan	yes/yes

The camera has the ability to autonomously recognize and compare faces, but it can also be part of the face recognition system, working with selected NOVUS 6000 series IP recorders (models with "F" in the name).




300 mm

415 mm




246.7 mm

Ø71 mm



82 mm

10 mm  
116 mm



115 mm

160 mm