



Hardened 8-port PoE+ Switch


NVS-3308SP-EH



KEY FEATURES

- 4 x 10/100/1000Mbps High PoE , 4 x 10/100/1000Mbps PoE+
- 1 x 10/100/1000Mb/s UPLINK, 1 x 1000Mb/s SFP UPLINK
- Operating temperature: -40°C ÷ 70°C

DIMENSIONS

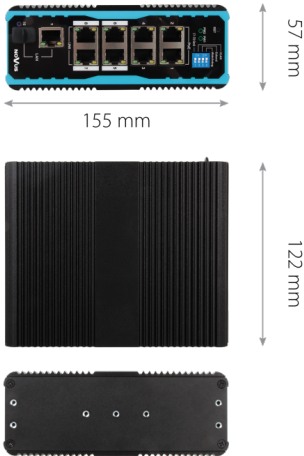

GENERAL	
Device Type	Hardened HighPoE / PoE+ switch
NETWORK	
Ports	PoE Ports: 8 x RJ45(10/100/1000Mbps) (4 x PoE+ 30W, 4 x High PoE 90W, total power limited by the power supply capacity) UPLINK ports: 1 x 10/100/1000Mbps, UPLINK SFP port 1Gb/s x1
PoE standards	IEEE802.3af, Class 3, IEEE802.3at, Class 4, IEEE802.3bt, Class 8
PoE modes	Endspan (1,2+ / 3,6-)
Surge protection	Maximum voltage: 6kV
Switching capacity	20 Gb/s
Protocols Support	IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX/LX
MAC address list	4K
FUNCTIONS	
Additional operating modes	VLAN, Extend, QoS, PoE Watchdog
INSTALLATION PARAMETERS	
Case	Metal, color black, enclosure with possibility to mount on DIN TH35 rail
Dimensions (mm)	57 (W) x 155 (H) x 122 (L)
Weight	0.9 kg
Input Voltage	48 VDC (power supply 100 ~ 240 VAC/48 VDC Included)
Power Consumption	144 W (maximum)
PoE Budget	125 W for ports 1 to 8, up to 90 W for one port
Operating Temperature	-40°C ~ 70°C