




Thermal IP Bullet Camera

NVIP-H-8535/T

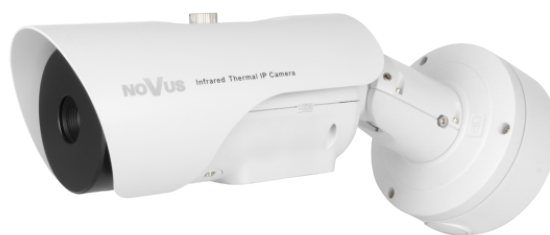

8000

VSS
PROJECT

FUNCTIONS



COMPLIANCE



KEY FEATURES

- lens: thermal fixed focal length, $f=35$ mm/ $F1.0$
- built-in microphone
- Video content analysis based on Deep Learning
- SD card support
- Temperature Measurement
- Temperature Alarm
- Ability to observe in total darkness
- two-way audio

DIMENSIONS



Image - Thermal Module	
Image Sensor	Uncooled FPA Microbolometer
Number of Effective Pixels	384 (H) x 288 (V)
Pixel Size	17 μ m
Spectral Range	8 - 14 μ m
Thermal Sensitivity	40 mK
Thermovision Modes	White Hot, Black Hot, Rainbow, Ironbow, HSV, Autumn, Bone, Cool, Copper, Fire Hot, Pink, Spring, Summer, Winter, Jet, Flame, Rosebengal
Detection Temperature Range	-20°C ~ 150°C
Digital Noise Reduction (DNR)	2D, 3D
Lens - Thermal Module	
Lens Type	fixed focal length, $f=35$ mm/ $F1.0$
DRI (Detection, Recognition, Identification)	people: D - 1029m, R - 257m, I - 129m vehicles: D - 3157m, R - 789m, I - 395m
Object Detection Range	206m - fire (for object size 0.2x0.2 m)
Temperature measurement range	82m (for object size 0.2x0.2 m)
Image	
Defog Function (F-DNR)	yes
Network	
Stream Resolution	1280 x 720 (HD), 704 x 576, 352 x 240, 384 x 288
Frame Rate	30 fps for each resolution
Multistreaming Mode	number of streams: 2 (main stream, sub stream)
Video/Audio Compression	H.264, H.265, MJPEG/G.711, RAW_PCM
Number of Simultaneous Connections	max. 10
Bitrate	for H.264 : 100 kbps - 8000 kbps for H.265 : 100 kbps - 8000 kbps
Network Protocols Support	HTTP, TCP/IP, IPv4/v6, UDP, HTTPS, Multicast, FTP, DHCP, DNS, DDNS, NTP, RTSP, RTP, UPnP, SNMP, QoS, IEEE 802.1X, PPPoE, SMTP, RTCP, ICMP, HTMLS, HTTP POST
Communication protocols support	MODBUS
ONVIF Protocol Support	Profile G/S/T/M
Camera Configuration	from Edge, Firefox, Chrome, Opera browser languages: Polish, English, and others
Compatible Software	NOVUS MANAGEMENT SYSTEM VSS, N Control 8000
Video Analytics	
Functions	line cross, zone entrance, zone exit, zone violation, double line cross, multi loiter, wrong direction, objects distinguishing, people counting, smoker detection, fire detection, smart motion detection with objects distinguishing
Other functions	
Temperature Measurement	yes
Temperature Alarm	yes
Temperature Measurement Zones	20 polygon, line, point
Temperature Measurement Accuracy	+/-2°C / +/-2%
Security	IEEE 802.1X support, HTTPS support, MAC/IP address filtering, force change of default password
Privacy Zones	4 video mask type: single color
Motion Detection	yes
Region of interest (ROI)	8
Audio Detection	yes
Image Processing	vertical flip, horizontal flip
Prealarm/Postalarm	-/up to 86400 s
System Reaction to Alarm Events	e-mail with attachment, saving file on FTP server, saving file on SD card, alarm output activation, playback of the audio message
Determent	built-in speaker (predefined or custom voice messages)
Restoring default settings	using reset button
Interfaces	
Video Output	CVBS, 1.0 Vp-p, 75 Ohm
Audio Input/Output	1/1 built-in microphone/speaker
Alarm Input/Output	2 (NO/NC)/2 relay type (max. 12VDC/300mA)
Control Input/Output	RS-485
Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
Memory Card Slot	SD - capacity up to 1000GB
Installation parameters	
Dimensions (mm)	with bracket: 110 (Ø) x 388 (L)
Weight	1.9 kg
Degree of Protection	IP 66 (details in the user's manual)
Enclosure	aluminium, white, fully cable managed wall mount bracket in-set included enclosure type: 4H-B
Power Supply	12 VDC, 24 VAC, PoE (IEEE 802.3af, Klasa 3)
Power Consumption	4.5 W
Operating Temperature	-40°C ~ 60°C
Humidity	max. 90%, relative (non-condensing)