![NOVUS logo]

4-port PoE Switch

NVS-3104SP

KEY FEATURES

- 4 x 100Mb/s PoE+
- 2 x 100Mb/s UPLINK

DIMENSIONS

28 mm

140 mm

92 mm
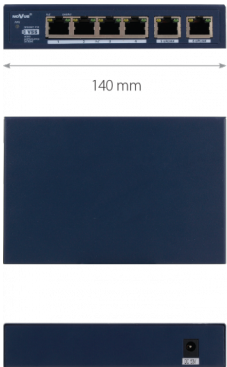
GENERAL	
Device Type	PoE+ Switch
NETWORK	
Ports	PoE+ Ports: 4 x 10/100Mb/s (the number of ports simultaneously operating with PoE + mode is limited by PoE budget), UPLINK ports: 2 x 10/100Mb/s
PoE standards	IEEE802.3af, Class 3, IEEE802.3at, Class 4
PoE modes	Endspan (1,2+ / 3,6-)
Switching capacity	1.2 Gb/s
Protocols Support	IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3x
MAC address list	1K
INSTALLATION PARAMETERS	
Case	Metal, color navy blue
Dimensions (mm)	140 (W) x 28 (H) x 92 (L)
Weight	360 kg
Input Voltage	53 VDC (power supply 100 ~ 240 VAC/53 VDC included)
Power Consumption	60 W (maximum)
PoE Budget	60 W for ports 1 to 4, up to 30 W for one port
Operating Temperature	0°C ~ 40°C