




32-channel IP Recorder

NVR-6332P16-H4/F-II



FUNCTIONS



The recorder is dedicated to work with NOVUS 6000 series IP cameras. Detailed data can be found in the compatibility table available in the DOWNLOADABLE FILES tab.

Video	
IP Cameras	up to 32 channels at 4000 x 3000 resolution (video + audio)
Maximum Supported Camera Resolution	4000 x 3000
Compression	H.264, H.264+, H.265, H.265 Smart
Monitor Output	main (split screen, full screen, sequence): 1 x HDMI (4K UltraHD) / VGA (up to 2 monitors simultaneously) spot: 1 x HDMI (FullHD)
Dualstreaming Support	yes
Fisheye Support	yes, 6000 IP series cameras using N-VID6, Internet Explorer, N Control 6000
Audio	
Audio Input/Output	1 x line-in (RCA) / 1 x HDMI, 1 x line-out (RCA)
Recording	
Stream Size	192 Mb/s in total from all cameras
Recording Mode	continuous, triggered by: manual, alarm input, motion detection, intelligent image analysis functions
Prealarm/Postalarm	up to 5 s/up to 600 s
Display	
Display Speed	960 fps (32 x 30 fps)
Playback	
Playback Speed	480 fps (16 x 30 fps)
Recorded Data Search	by date/time, events, image analysis events, POS, motion in a defined area, related to face recognition, tags, license plate number
Backup	
Backup Methods	USB port (HDD or Flash memory), network
Backup File Format	MP4, AVI, RPAS (player included)
Storage	
Internal Storage	available mount: 4 x HDD 3.5" 10 TB SATA
Total Internal Capacity	40 TB
External storage	1 x eSATA
Total External Capacity	10 TB
Alarm	
Internal Alarm Input/Output	16/4 relay type
Camera Alarm Input/Output	supports IP camera's alarm input/output
Motion Detection	supports camera's motion detection
System Reaction to Alarm Events	buzzer, e-mail, alarm output activation, recording activation, PTZ, e-mail with attachment, Full Screen, PUSH message, voice prompt, snapshot
Intelligent image analysis	
Supported Functions	Exception, Scene Change, Video Blurred, Video Color Cast, Tripwire, Zone entrance, Abandoned Object, Object Disappearance, Face Recognition, Perimeter Intrusion Detection by pedestrian or vehicle, Line Cross Detection by pedestrian or vehicle, License Plate Recognition (LPR)
Database Capacity	10000 faces 50000 license plates
Other parameters	face recognition for 6 NOVUS 6000 series IP cameras with 'F' in the model name or 2 ONVIF cameras
Network	
Network Interface	2 x Ethernet - RJ-45 interface, 10/100/1000 Mbit/s 16 x Ethernet PoE (IEEE802.3af/at, Class 4) - RJ-45 interface, 10/100 Mbit/s, with Extended mode
Network Protocols Support	HTTP, TCP/IP, IPv4/v6, HTTPS, FTP, DHCP, DNS, DDNS, NTP, RTSP, UPnP, SNMP, IEEE 802.1X, PPPoE, SMTP, P2P, POS, HTML5
PC/MAC Software	NOVUS MANAGEMENT SYSTEM VSS, NOVUS MANAGEMENT SYSTEM AC, NMS, Internet Explorer, Firefox, Chrome, Opera, N Control 6000, Edge/Safari, N Control 6000
Mobile applications	N-VID6 (iPhone, Android)
Number of Simultaneous Connections	up to 128 clients, up to 36 main streams or 128 substreams or 32 playback streams in total
Bandwidth	192 Mb/s in total to all client workstations
PTZ	
PTZ Functions	pan/tilt/zoom, preset commands
Auxiliary Interfaces	
USB Ports	1 x USB 3.0, 2 x USB 2.0
Operating system	
Operating System	Linux
OSD	languages: Polish, English, others
Control	PC mouse and IR remote controller (in-set included), network
System Diagnostic	automatic control of: HDDs, network, camera connection loss
Security	password protection, IP filtering, MAC filtering, ARP guard
Installation parameters	
Dimensions (mm)	440 (W) x 70 (H) x 390 (D)
Weight	4.4 kg (without HDD)
Power Supply	100 ~ 240 VAC
Power Consumption	60 W (with 4 HDDs) + 150 W PoE
Operating Temperature	-10°C ~ 50°C
RACK Mount 19"	2U


COMPATIBILITY



KEY FEATURES

- 16 x PoE Ethernet ports
- 32 x video and audio channels
- Recording speed up to 960 fps at 4000 x 3000
- Supports resolution up to 4000 x 3000
- Recorded stream size: 192 Mb/s in total from all cameras
- 4 x internal place for HDD mounting
- 3 x monitor outputs (HDMI 4K UltraHD, HDMI, VGA)
- RACK mount
- Face recognition

DIMENSIONS

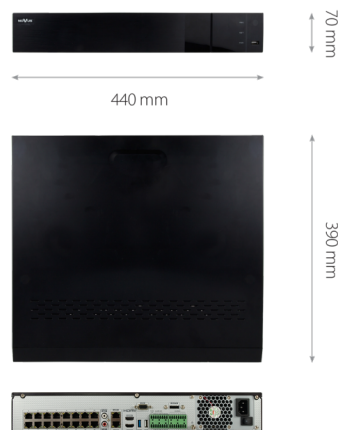

The availability of individual functions (including image analysis) depends on the model of the cameras used, as well as the software version of the recorder and cameras. In order to create face recognition system, please deploy NOVUS 6000 series IP cameras with 'F' in the model name. Presented display and playback speeds are achieved using dual-streaming. Detailed data on hard drives can be found in the compatibility table available in the DOWNLOADABLE FILES tab.